



Toshiba Portege R835-P88 Screen Replacement

This guide will show you how to replace a broken screen.

Written By: Madison Crawford



INTRODUCTION


This guide will show you how to correctly replace a Toshiba Portege R-835 P88 screen.



TOOLS:


- [Phillips #000 Screwdriver](#) (1)
 - [Metal Spudger](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Screen

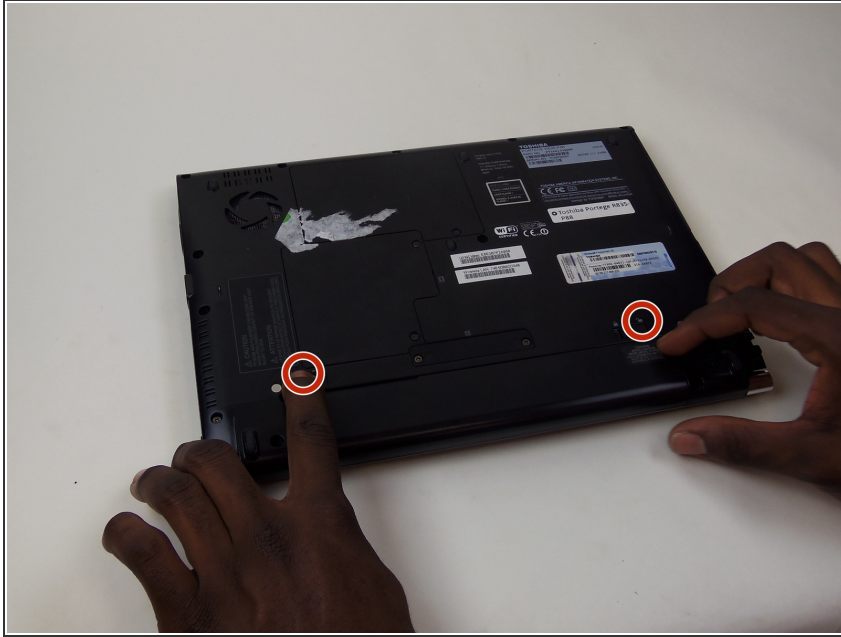


- Remove the battery by pressing the two buttons inward and pulling the battery out.

Step 2

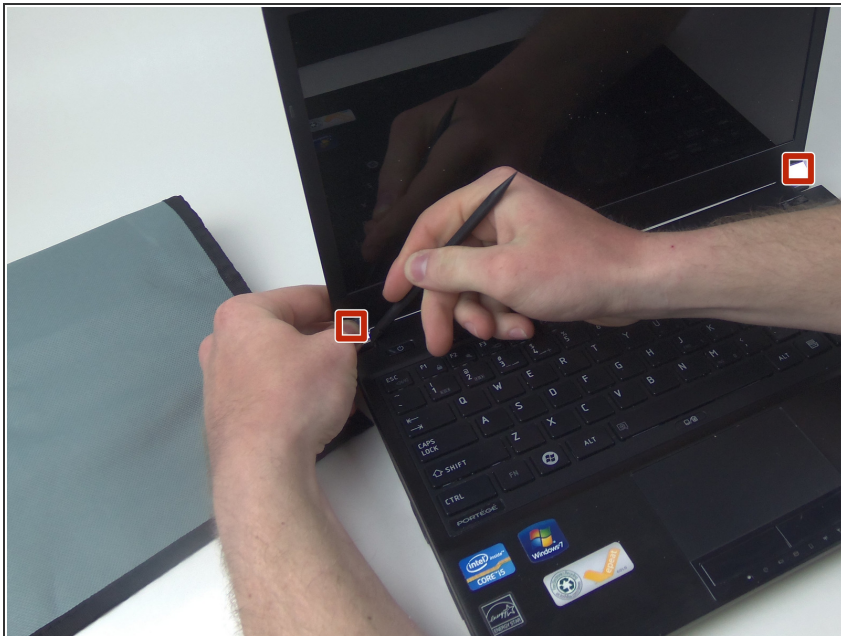

- Remove the end caps located on the left and right corners below the screen.

Step 3

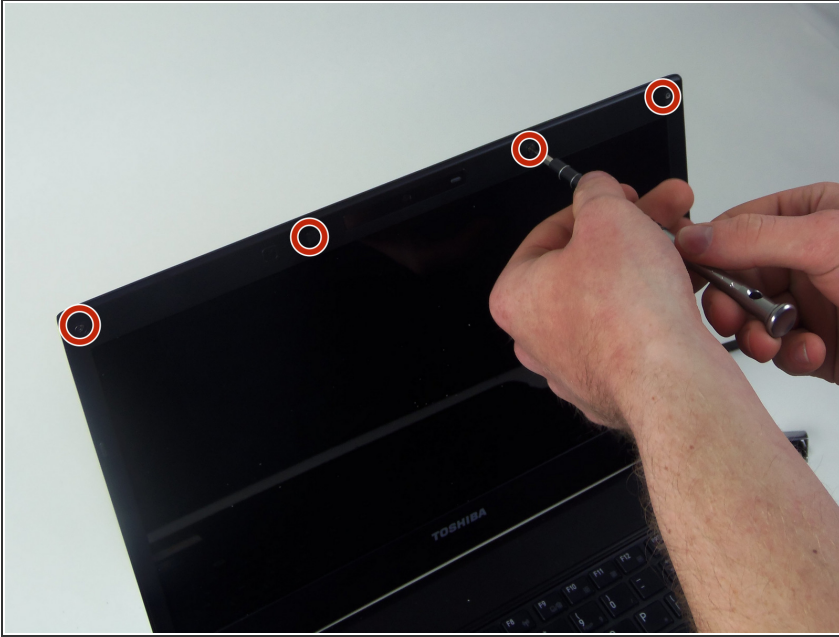

- Remove the square rubber caps on top of the screws
- Remove the 4 mm screws at the top
- remove the two 6 mm screws that were under the chrome caps at the bottom.

Step 4





- Remove the plastic bezel by lightly prying on it. It will pop when it starts to come loose.

Step 5



- Remove tape from around cord attached to the bottom of the screen.
- Place the screen on top of the keyboard

Step 6

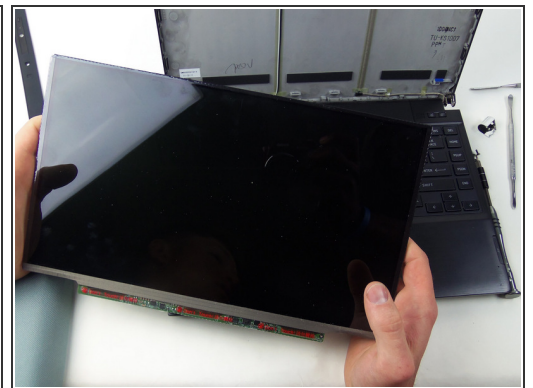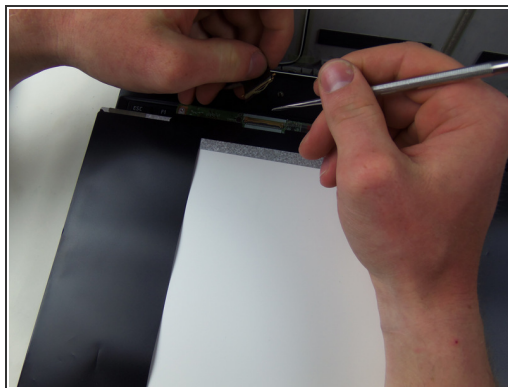

- Remove the cord from the screen by cutting the tape where the two fittings meet. After that pull them apart.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-22 04:19:47 PM.